


CERTIFICATE

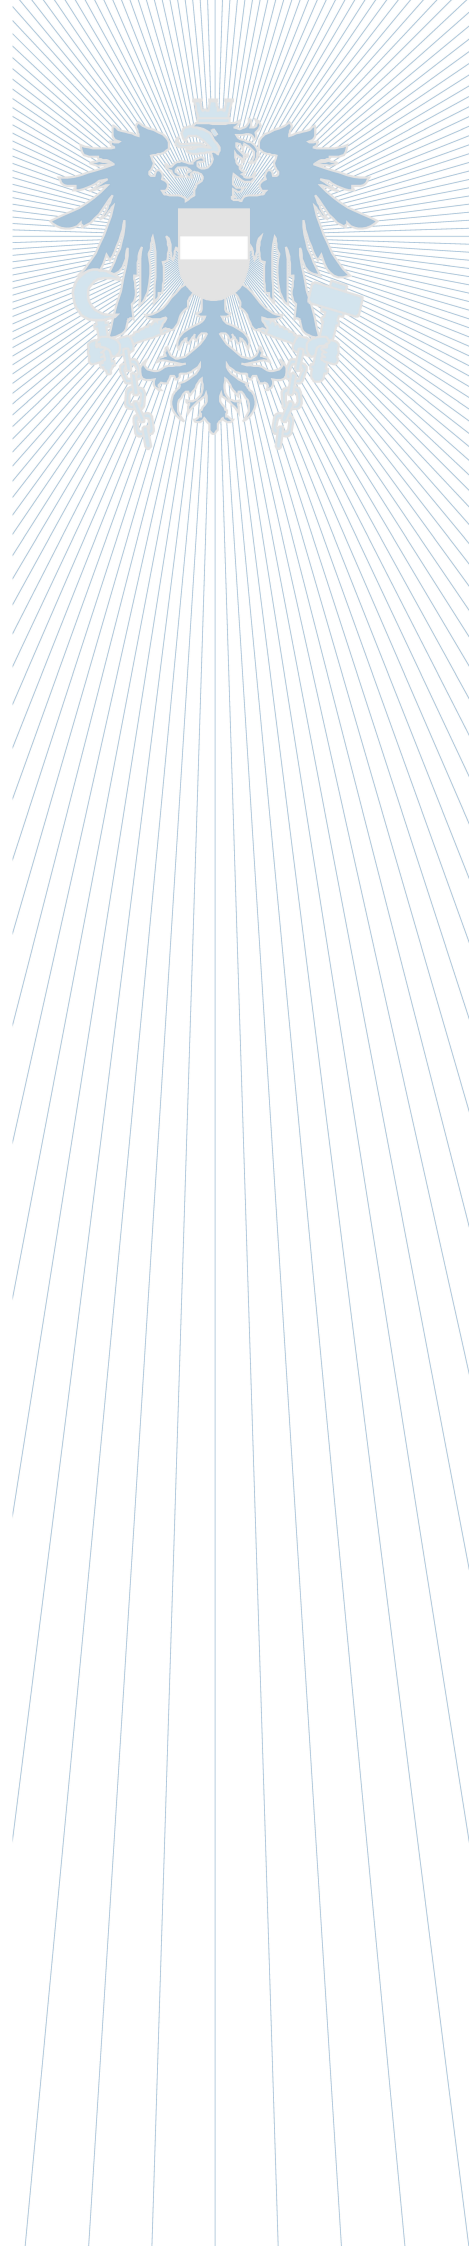

The certification body certifies that

Fundermax

FunderMax GmbH

Klagenfurter Straße 87-89

9300 St. Veit/Glan

Austria

with the sites Wiener Neudorf and Neudörfel

has implemented and maintains a quality-, environmental-, energy- and occupational health and safety management system in the sector of

production, product development, sales and distribution of wood-based materials and compact laminates.

A certification audit has verified that this management system fulfils the requirements of the international standards

**ISO 9001:2015, ISO 14001:2015
ISO 50001:2018, ISO 45001:2018.**

transferred on: January 19th, 2019
extended on: February 17th, 2022
valid to: January 23rd, 2025

The validity of this SystemCERT certificate requires annual surveillance audits and a three-year re-certification audit.

Leoben, February 17th, 2022


Uwe Hackl, MBA
(management board)



Registration-No.: QUOE08100919

SystemCERT Zertifizierungsgesellschaft m.b.H.
Parkstraße 11, 8700 Leoben, Austria
Accredited according to accreditation notification
by Accreditation Austria, ID Nr. 0930

Certificate SGSCH-COC-110046 / SGSCH-CW-110046

The Organization

FunderMax GmbH

Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria

has been assessed and certified as meeting the requirements of

FSC™ Chain-of-Custody

The company was assessed against the following standards

FSC-STD-40-004 V3-1 - Chain of Custody Certification

FSC-STD-40-003 V2-1 Chain of Custody Certification of Multiple Sites – November 2014

FSC-STD-40-005 V3-1 Requirements for Sourcing FSC Controlled Wood – February 2017

FSC-STD-40-007 V2-0 Sourcing reclaimed material for use in FSC Product Groups or FSC Certified Projects – April 2011

FSC-STD-50-001 Requirements for use of the FSC trademarks by Certificate Holders

for the products detailed in the scope below:

The Scope of Registration appears on page 2 of this certificate

This certificate is valid from 11 July 2023 until 26 September 2026 and remains valid subject to satisfactory surveillance audits.

Issue 7. Certified since 23 September 2010

This is a multi-site certification. Additional site details are listed on the subsequent page.



Authorised by
Sylvie Seisun

Authorised by
Christian Kobel

SGS Société Générale de Surveillance SA
1, Place des Alpes, 1201 Geneva, Switzerland
t +41 (0)22 739 91 11 - www.sgs.com

The validity of this certificate shall be verified on <http://info.fsc.org/> For the full list of product groups covered by the certificate see <http://info.fsc.org/> This certificate itself does not constitute evidence that a particular product supplied by the certificate holder is FSC-certified [or FSC Controlled Wood]. Products offered shipped or sold by the certificate holder can only be considered covered by the scope of this certificate when the required FSC claim is clearly stated on sales and delivery documents. The certificate remains the property of SGS. The certificates and all copies or reproductions shall be returned or destroyed if requested by SGS



This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FSC™ Chain-of-Custody

Einkauf von Industrierundholz, Sägenebenprodukten, Altholz und Papier; FSC 100%, FSC Mix, FSC Controlled Wood, Controlled Wood, Pre-Consumer und Post-Consumer Reclaimed. Herstellung und Verkauf von Holzplatten FSC Mix, FSC Controlled Wood sowie Compact Laminaten, FSC Mix, FSC Recycled und FSC Controlled Wood, Kredit System, mehrere Standorte und Auslagerungen von Zuschnittarbeiten.

Ein- und Verkauf (Handel) von Holzplatten, Compact Laminaten, Faserplatten und Spezialpapieren, FSC Mix, FSC Recycled und FSC Controlled Wood, Transfersystem, mehrere Standorte.

Purchase of industrial roundwood, sawmill by-products, wood waste and paper; FSC 100%, FSC Mix, FSC Controlled Wood, Controlled Wood, Pre-Consumer und Post-Consumer Reclaimed. Production and sale of wood panels, FSC Mix, FSC Controlled Wood and compact laminates, FSC Mix, FSC Recycled and FSC Controlled Wood, credit system, multisite and outsourcing of cutting work.

Purchase and sale (trade) of wood panels, compact laminates, fibreboards and special papers, FSC Mix, FSC Recycled und FSC Controlled Wood, transfer system, multisite.



This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FunderMax GmbH

FSC™ Chain-of-Custody

Issue 7
Sites
FunderMax GmbH Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria
FunderMax GmbH Bickfordstraße 6, 7201 Neudörf, Austria
FunderMax GmbH Industriezentrum NÖ-Süd, 2355 Wiener Neudorf, Austria
Fundermax Swiss AG Industriestraße 38, 5314 Kleindöttingen, Switzerland
Baufeld Austria GmbH Viktringer Ring 28, 9020 Klagenfurt, Austria



This document is an authentic electronic certificate for Client* business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



ENVIRONMENTAL PRODUCT DECLARATION

as per /ISO 14025/ and /EN 15804/




Owner of the Declaration	FunderMax GmbH
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-FMX-20190036-IBA2-EN
Issue date	18.04.2019
Valid to	17.04.2024

MAX Compact Panels FunderMax GmbH

www.ibu-epd.com / <https://epd-online.com>



1. General Information

<p>FunderMax GmbH</p> <p>Programme holder IBU - Institut Bauen und Umwelt e.V. Panoramastr. 1 10178 Berlin Germany</p> <hr/> <p>Declaration number EPD-FMX-20190036-IBA2-EN</p> <hr/> <p>This declaration is based on the product category rules: Laminates, 10.2018 (PCR checked and approved by the SVR)</p> <hr/> <p>Issue date 18.04.2019</p> <hr/> <p>Valid to 17.04.2024</p> <hr/> <p></p> <hr/> <p>Prof. Dr.-Ing. Horst J. Bossenmayer (President of Institut Bauen und Umwelt e.V.)</p> <hr/> <p></p> <hr/> <p>Dr. Alexander Röder (Managing Director IBU)</p>	<p>MAX Compactplatten</p> <p>Owner of the declaration FunderMax GmbH Klagenfurter Straße 87-89 9300 St. Veit/Glan Österreich</p> <hr/> <p>Declared product / declared unit 1 m² Compactplatte</p> <hr/> <p>Scope: This LCA is based on data for the 2017 financial year and was collected in the Wiener Neudorf plant.</p> <p>The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.</p> <hr/> <p>Verification</p> <p>The standard /EN 15804/ serves as the core PCR</p> <p>Independent verification of the declaration and data according to /ISO 14025:2010/</p> <p><input type="checkbox"/> internally <input checked="" type="checkbox"/> externally</p> <hr/> <p></p> <hr/> <p>Juliane Franze (Independent verifier appointed by SVR)</p>
--	--

2. Product

2.1 Product description / Product definition

FunderMax Compact panels are high-pressure decorative laminate panels (HPL) in accordance with /EN 438 – Part 4/ (MAX Compact Interior) and /EN 438 – Part 6/ (MAX Compact Exterior) for use as wall and ceiling panelling as well as furniture panels in interior and exterior applications.

High-pressure decorative laminates are manufactured from cellulosic fibrous material and thermosetting resins. They can be produced in various colours, patterns and surface textures. MAX Compact Interior and MAX Compact Exterior can be glued, screwed or riveted to metal and wood substructures. A variety of other fastening and connecting materials can also be used.

Directive (EU) No. 305/2011 (CPR) applies for placing the product on the market in the EU/EFTA (with the exception of Switzerland). The product requires a Declaration of Performance taking consideration of the /EN 438-7:2005/, High-pressure decorative laminates (HPL) – Sheets based on thermosetting resins (laminates) – Part 7: Compact panels and HPL composites for internal and external wall and ceiling finishes, and the CE marking. Use is governed by the respective national regulations. A full list of all valid approvals and test reports is available at www.Fundermax.at.

2.2 Application

Compact panels can be used in both public and private applications. They are particularly suitable for residential applications, hospitals, public buildings, train stations and airports, for public transport, hotels, schools, business premises, sports facilities and industrial applications. Their special features enable the use of HPL in interior applications as wall panelling, railing infills, furniture, tables, column cladding, laboratory facilities, cabins, ceilings, window sills, worktops, business consoles, washstands etc.

2.3 Technical Data

Bautechnische Daten

Name	Value	Unit
Reaction to fire (standard quality) acc. to /EN 13501-1/	D - s2, d0	Class
Reaction to fire (standard quality) acc. to /EN 13501-1/	B - s2, d0	Class
Resistance to fixings acc. to /EN 438-7, section 4.5/	>= 2000	N
Flexural strength acc. to /ISO 178/	>= 80	MPa
Flexural modulus acc. to /ISO 178/	>= 9000	MPa
Release of formaldehyde acc. to /EN 717-1/	E1	Class
Resistance to climatic shock acc.	passed	-

to /EN 438-2, section 19/		
Durability – Resistance to immersion in boiling water acc. to /EN 438-2, section 12/	passed	-
Durability – Resistance to wet conditions acc. to /EN 438-2, section 15/	passed	-
Density acc. to /ISO 1183/	>= 1350	kg/m ³

The product's performance values correspond with the Declaration of Performance in terms of its essential properties in accordance with EN 438-7:2005, High-pressure decorative laminates (HLP) – Sheets based on thermosetting resins – Part 7: Compact panels and HPL composite panels for internal and external wall and ceiling finishes.

2.4 Delivery status

FunderMax Compact panels are available as full-size panels or cut-to-size panels with a maximum length of 4100 mm and a maximum width of 1850 mm. MAX Compact Interior panels are available in thicknesses of 2–25 mm while MAX Compact Exterior panels can be produced in thicknesses of 2–20 mm.

2.5 Base materials / Ancillary materials

Compact panels with a thickness of 8.2 mm and an average density of 1450 kg/m³ comprise the following (figures as % by mass per 1m² production):

- Decorative paper 2–12%
- Kraft paper 55–62%
- Melamine resin 2–12%
- Phenol resin 20–32%
- Aluminium 16%

The flame-retardant version also contains up to 4% flame retardant based on phosphorous.

All panels and laminates supplied by FunderMax are products in accordance with the REACH Directive EC No. 1907/2006, Article 3 (3).

- 1) The product contains substances on the List of Candidates (date: 15.01.2019) exceeding 0.1% by mass: no
- 2) The product contains other CMR substances in categories 1A or 1B which are not on the candidate list, exceeding 0.1% by mass in at least one partial product: no
- 3) Biocide products were added to this construction product or it has been treated with biocide products (this then concerns a treated product as defined by the (EU) Ordinance on Biocide Products No. 528/2012): no

2.6 Manufacture

Compact panels are manufactured by pressing cellulosic fibrous material impregnated with thermosetting resins while applying consistent heat (temperature ≥ 120 °C) and high pressure (≥ 5 MPa) to create a homogenous, non-porous material of increased density (≥ 1.35 g/cm³) and the requisite surface quality.

2.7 Environment and health during manufacturing

Waste heat is recovered via heat exchangers.

2.8 Product processing/Installation

The processing properties displayed by FunderMax Compact panels are similar to those when processing hardwood. Tools with carbide tips are essential. Compact panels can be used on substrates or can even be self-supporting if they are of the corresponding thickness. For this, they are fixed using screws or rivets, or glued to substructures. Standard safety guidelines concerning dust precipitation, dust extraction, fire prevention etc. must be observed during processing.

2.9 Packaging

On wooden pallets with base and cover panels (particle board or polypropylene web plate), wrapped in polyethylene foil if required, secured by steel or plastic hoops. Plastic hoops are made of PET.

2.10 Condition of use

The resins and therefore the Compact panels remain permanently stable even when used outdoors. No substances are leached. The mechanical properties remain constant.

2.11 Environment and health during use

FunderMax Compact panels are a crosslinked, duroplastic material. Emissions of formaldehyde or VOC are extremely low and fall significantly short of statutory requirements. They are approved for contact with food in everyday use. Owing to their extremely low level of permeability, they are suitable as a seal against emissions (e.g. formaldehyde) released by the substrate. The decorative surfaces are largely resistant to all household solvents and chemicals; the material has therefore been used for many years in applications in which cleanliness and hygiene are imperative. The closed surface can be easily disinfected using hot water, steam or any disinfectants used in hospitals and commercial applications.

2.12 Reference service life

No uniform reference service life can be indicated on account of the multiple application possibilities. However, the life cycle can exceed 50 years even in areas subject to high levels of wear such as facades /life cycle costs of facades/.

2.13 Extraordinary effects

Fire

Fire safety (tests acc. to EN 13823 and ISO 11925-2 in compliance with the ÖNORM EN 13501-1)

FunderMax Compact panels are difficult to set fire to and tend to delay the propagation of flames, thereby extending the escape time. Like any other organic material, toxic substances can be contained in the smoke if the panels are not incinerated in full. At the customer's request, FunderMax Compact panels are available in F-quality and containing halogen-free flame retardants. In fires involving FunderMax Compact panels, the same fire-fighting techniques can be applied as for other building materials containing wood.

Fire protection

Name	Value
Building material class	B
Burning droplets	s1 (Max Compact F

	Qualität), s2 (MAX Exterior FQualität)
Smoke gas development	d0

Water

FunderMax Compact panels are waterproof. Trapped moisture should be avoided. No ingredients are leached which could be hazardous to health.

Mechanical destruction

FunderMax Compact panels are distinguished by their very high level of mechanical resistance. If however the panels break, sharp-edged fragments can form.

2.14 Re-use phase

Material reuse is not generally possible. Energetic utilisation in industrial firing plants is recommended on account of the high calorific value.

2.15 Disposal

Energy recovery
 Waste codes in accordance with the ÖNORM S 2100:18702
 Waste code in accordance with the European Waste Catalogue: 17 02 01/03

2.16 Further information

Further information on the properties and processing of FunderMax Compact panels is available at www.fundermax.at.

3. LCA: Calculation rules

3.1 Declared Unit

The declared unit is one square metre of FunderMax Compact panel (8.21 mm thick and density of approx. 1450 kg/m³).

In accordance with the PCR, the declared unit comprises one Compact panel (excluding packaging) with a basis weight of 11.9 kg/m².

The packaging and transport of packaging is analysed but is not part of the declared unit.

Declared unit

Name	Value	Unit
Declared unit	1	m ²
Grammage	11.9	kg/m ²
Conversion factor to 1 kg	-	-

Fundermax panels (calorific value: 19 MJ/kg) are recycled in an incineration plant which complies with the EU average. The ensuing emissions are modelled in C3 and the energy coupled by incineration is substituted and allocated to Module D.

3.4 Cut-off criteria

All operating data was taken into consideration. Accordingly, material flows accounting for < 1% have also been analysed. Some of the waste incurred during production was not considered in the study (waste oil, paper). These mass flows are very small. Flows which were not considered account for less than 1% of overall mass. It can therefore be assumed that the total of all neglected processes does not exceed 5% in the impact categories. Accordingly, the cut-off criteria according to /EN 15804/ are complied with.

3.2 System boundary

This is a "cradle-to-gate, with options" EPD. This LCA addresses the life cycle stages A1 – A3, C3 and D in accordance with /EN 15804/.

The product stage comprises the production of all requisite raw materials including all upstream chains as well as CO₂ absorption by raw materials (wood growth through photosynthesis). The next processes involve production of the Compact panel including the provision of energy taking consideration of the corresponding upstream chains. All necessary transport for raw materials and ancillaries is considered in the LCA.

The emission of biogenic CO₂ bound in the product is listed in Module C3, thereby safeguarding CO₂ neutrality within the product system.

After use, the product is disposed of in a waste incineration plant which generates thermal energy and electricity. The ensuing effects are declared in Module C3 and the potential energy substitution is declared in Module D.

3.5 Background data

The background data originates from the /GaBi 8.0:2018a/ data base by thinkstep. The respective data base is the /GaBi 2018/, version 8.0.

3.6 Data quality

Data on the products under review was collated at the production facility on the basis of a questionnaire drawn up by thinkstep. The input and output data was made available by FunderMax and examined for plausibility with the result that good data representativity can be assumed.

Data sets are largely available in the /GaBi 8.0:2018a/ data base for the basic materials used in the corresponding formulae. The data base used here was last updated in early 2018.

Other data sets on the upstream chain associated with the manufacture of basic materials are approximated with data sets of similar chemicals or estimated by merging existing data sets.

3.3 Estimates and assumptions

The Compact panels are incinerated in a waste incineration plant (the laminates are generally burned along with the wood-based substrate in such plants). Fundermax Compact panels can be collected in full. It was therefore assumed that 100% are incinerated and thermal evaluation was also assessed with a 100% preparation rate for the products.

3.7 Period under review

The primary data collated concerns the period of 2017 (annual average / extrapolated to annual volumes / period of 12 months) and was collected taking consideration of the following data sources:

- Measurements at the plants
- Statistics from in-plant EDP systems
- Piece lists

3.8 Allocation

No co-product allocation is necessary for the LCA of the Compact panels produced by FunderMax as no

coupled products arise during production. In this study, disposal of the material residue from production in incineration plants count as “allocation for multi-input processes”. Taking consideration of the elementary composition and calorific value, substitution is calculated for the energy recovered in the waste incineration plant. This recovered energy following electrical and thermal energy substitution is allocated directly to the production stage. This is possible as the volume does not exceed the energy requirements on the input side for the provision of energy during production and preliminary product manufacturing. The energy under review is of the same quality. No

allocation processes were applied for reuse, recycling or recovery in this LCA study of the Compact panel.

3.9 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

The used background database has to be mentioned.

4. LCA: Scenarios and additional technical information

End of Life (C3)

Name	Value	Unit
Collected separately waste type	11.9	kg
Collected as mixed construction waste	0	kg
Reuse	0	kg
Recycling	0	kg
Energy recovery	11.9	kg
Landfilling	0	kg

Name	Value	Unit
Calorific value of Compact panels	19	MJ/kg
Incineration plant efficiency	0,48	
R1-value	>0.6	

After use, the product is disposed of in a waste incineration plant which generates thermal energy and electricity. The ensuing effects are declared in Module C3 and potential credits (energy substitution) are declared in Module D.

5. LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MNR	MNR	MNR	MND	MND	MND	MND	X	MND	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT: 1 m² Compactplatte

Parameter	Unit	A1-A3	C3	D
Global warming potential	[kg CO ₂ -Eq.]	2.09E+1	1.89E+1	-8.74E+0
Depletion potential of the stratospheric ozone layer	[kg CFC11-Eq.]	1.29E-10	2.95E-13	-6.44E-12
Acidification potential of land and water	[kg SO ₂ -Eq.]	4.37E-2	1.72E-2	-8.28E-3
Eutrophication potential	[kg (PO ₄) ³ -Eq.]	9.76E-3	4.52E-3	-1.12E-3
Formation potential of tropospheric ozone photochemical oxidants	[kg ethene-Eq.]	5.33E-3	1.10E-3	-8.96E-4
Abiotic depletion potential for non-fossil resources	[kg Sb-Eq.]	1.01E-5	2.32E-6	-1.10E-6
Abiotic depletion potential for fossil resources	[MJ]	5.22E+2	1.53E+1	-1.38E+2

RESULTS OF THE LCA - RESOURCE USE: 1 m² Compactplatte

Parameter	Unit	A1-A3	C3	D
Renewable primary energy as energy carrier	[MJ]	1.41E+2	1.23E+0	-1.02E+1
Renewable primary energy resources as material utilization	[MJ]	1.34E+2	0.00E+0	0.00E+0
Total use of renewable primary energy resources	[MJ]	2.75E+2	1.23E+0	-1.02E+1
Non-renewable primary energy as energy carrier	[MJ]	4.04E+2	1.60E+1	-1.49E+2
Non-renewable primary energy as material utilization	[MJ]	1.35E+2	0.00E+0	0.00E+0
Total use of non-renewable primary energy resources	[MJ]	5.39E+2	1.60E+1	-1.49E+2
Use of secondary material	[kg]	0.00E+0	0.00E+0	0.00E+0
Use of renewable secondary fuels	[MJ]	0.00E+0	0.00E+0	0.00E+0
Use of non-renewable secondary fuels	[MJ]	0.00E+0	0.00E+0	0.00E+0
Use of net fresh water	[m ³]	1.27E-1	5.79E-2	-1.39E-2

RESULTS OF THE LCA – OUTPUT FLOWS AND WASTE CATEGORIES:

1 m² Compactplatte

Parameter	Unit	A1-A3	C3	D
Hazardous waste disposed	[kg]	4.99E-6	3.34E-8	-5.44E-8
Non-hazardous waste disposed	[kg]	1.75E+0	1.19E+0	-3.58E-2
Radioactive waste disposed	[kg]	6.73E-3	2.60E-4	-4.42E-3
Components for re-use	[kg]	0.00E+0	0.00E+0	IND
Materials for recycling	[kg]	0.00E+0	0.00E+0	IND
Materials for energy recovery	[kg]	0.00E+0	1.19E+1	IND
Exported electrical energy	[MJ]	0.00E+0	0.00E+0	-1.26E+1
Exported thermal energy	[MJ]	0.00E+0	0.00E+0	-1.10E+2

6. LCA: Interpretation

In all impact categories under review, the provision of raw materials plays a significant role (approx. 39–103%) except for the GWP where C3 is the largest contributor (CO₂ emissions by the waste incineration plant).

The greenhouse warming potential is the result of carbon dioxide during production. The inclusion of CO₂ by using wood in paper production is countered by other CO₂ emissions from the provision of raw materials which have an impact on greenhouse warming.

The net balance of C stored in the product and the emissions from production accounts for 20.9 kg CO₂ equivalent. All other GWP-relevant emissions are caused by incineration. These (biogenic) CO₂

emissions are declared in C3 (18.9 kg CO₂ equivalent).

Production including waste treatment and the production of auxiliaries reveal a minimum influence in all impact categories.

Transport contributes only 4.7% to the GWP.

Ozone Depletion Potential

The ozone depletion potential is primarily incurred by the use of paper in the production of Fundermax panels where organic emissions into the air containing halogens are responsible for the ozone depletion potential.

Substituting the ensuing energy utilisation of Fundermax panels at the end-of-life reduces the

overall ozone depletion potential. Here too, organic emissions into the air containing halogens are the main drivers for the ozone depletion potential.

Acidification Potential

Acidification is primarily caused by the provision of raw materials (61.42%) (Kraft liner and phenol). Other contributors are sulphur dioxide and nitrogen oxide emissions from the provision of energy. Here too, Kraft liner and phenol are the main contributors accounting for more than 68% of the overall impact within the modules under review (A1-A3).

Eutrophication Potential

Eutrophication is primarily influenced by the provision of raw materials and in particular the NO_x emissions in the upstream chains. During transport, the influence is also primarily attributable to NO_x emissions where Kraft liner is the main contributor accounting for approx. 46% of overall impact within the product system under review (A1-A3).

Photochemical Ozone Creation Potential

POCP is dominated by the provision of raw materials. The main contributors here are NMVOC, nitrogen oxide and sulphur dioxide emissions from the provision thereof. POCP indicates a negative value for transport (trucks). This is the result of NO emissions during transport. NO counters POCP in the calculation here.

Abiotic Depletion of Resources (fossil)

ADP primarily arises through the consumption of non-renewable fossil energy resources such as natural gas and pit coal.

The primary contributors here are the phenol and Kraft liners used.

Abiotic Depletion of Resources (elementary)

ADP elementary primarily arises here through non-regenerative material resources such as metals or rock salt.

The phenol (38.6%) and paper (31%) used in A1-A3 make particular contributions here.

The results indicated in the following table were calculated by applying the Traci method (Traci 2.1).

LCA RESULTS – ENVIRONMENTAL IMPACT: 1 m ² Compact panel (11.9 kg)				
Parameter	Unit	Compact panel		
		Production stage	Waste processing	Net credits and loads
		A1-A3	C3	D
Global warming potential (GWP)	[kg CO ₂ equiv.]	2.09E+01	1.89E+01	-8.74E+00
Ozone depletion potential (ODP)	[kg CFC11 equiv.]	1.29E-10	2.95E-13	-6.44E-12
Acidification potential of soil and water (AP)	[kg SO ₂ equiv.]	5.48E-02	2.37E-02	-9.19E-03
Eutrophication potential (EP)	[kg PO ₄ ³⁻ equiv.]	1.10E-02	1.67E-03	-5.70E-04
Photochemical ozone creation potential (POCP)	[kg O ₃ equiv.]	1.03E+00	7.89E-01	-1.87E-01
Resources - Fossil resources	MJ	7.19E+01	1.89E+00	-1.91E+01
LCA RESULTS – USE OF RESOURCES: 1 m ² Compact panel (11.9 kg)				
Parameter	Unit	Compact panel		
		Production stage	Waste processing	Net credits and loads
		A1-A3	C3	D
Renewable primary energy as energy carrier (PERE)	MJ	1.41E+02	1.23E+00	-1.02E+01
Renewable primary energy as material utilisation (PERM)	MJ	1.34E+02	0.00E+00	0.00E+00
Total use of renewable primary energy sources (PERT)	MJ	2.75E+02	1.23E+00	-1.02E+01
Non-renewable primary energy as energy carrier (PERE)	MJ	4.0360E+02	1.6000E+01	-1.4900E+02
Non-renewable primary energy as material utilisation (PENRM)	MJ	1.354E+02	0.00E+00	0.00E+00
Total use of non-renewable primary energy sources (PENRT)	MJ	5.3900E+02	1.60E+01	-1.49E+02
Use of secondary materials (SM)	[kg]	0.00E+00	0.00E+00	0.00E+00
Renewable secondary fuels (RSF)	MJ	0.00E+00	0.00E+00	0.00E+00
Non-renewable secondary fuels (NRSF)	MJ	0.00E+00	0.00E+00	0.00E+00
Net use of fresh water (FW)	[m ³]	1.27E-01	5.79E-02	-1.39E-02
LCA RESULTS – OUTPUT FLOWS AND WASTE CATEGORIES: 1 m ² Compact panel (11.9 kg)				
Parameter	Unit	Compact panel		
		Production stage	Waste processing	Net credits and loads
		A1-A3	C3	D
Hazardous waste for disposal (HWD)	[kg]	4.99E-06	3.34E-08	-5.44E-08
Non-hazardous waste for disposal (NHWD)	[kg]	1.75E+00	1.19E+00	-3.58E-02
Radioactive waste for disposal (RWD)	[kg]	6.73E-03	2.60E-04	-4.42E-03
Components for re-use (CRU)	[kg]	0.00E+00	0.00E+00	IND
Materials for recycling (MFR)	[kg]	0.00E+00	0.00E+00	IND
Materials for energy recovery (MER)	[kg]	0.00E+00	1.19E+01	IND
Exported energy per type (electricity)	MJ	0.00E+00	0.00E+00	IND
Exported energy per type (thermal energy)	MJ	0.00E+00	0.00E+00	IND

7. Requisite evidence

7.1 Formaldehyde

Measuring agency: ISEGA- Forschungs- und Untersuchungs-Gesellschaft mbH, 63704

Aschaffenburg; Postfach 100565 63741
Aschaffenburg, Zeppelinstr. 3-5, Germany
Test reports, date: 29.08.2011
Overall migration result:

Sample 1: 3.8 mg/dm²
Sample 2: 2.7 mg/dm²
GC-MS screening result: No links could be found.

7.2 Melamine

Measuring agency: ISEGA- Forschungs- und Untersuchungs-Gesellschaft mbH, 63704 Aschaffenburg; Postfach 100565 63741 Aschaffenburg, Zeppelinstr. 3-5, Germany
Test reports, date: 29.08.2011
Overall migration result:
Sample 1: 3.8 mg/dm²
Sample 2: 2.7 mg/dm²
GC-MS screening result: No links could be found.

7.3 Overall migration

Measuring agency: ISEGA- Forschungs- und Untersuchungs-Gesellschaft mbH, 63704 Aschaffenburg; Postfach 100565 63741 Aschaffenburg, Zeppelinstr. 3-5, Germany
Test reports, date: 29.08.2011
Overall migration result:
Sample 1: 3.8 mg/dm²
Sample 2: 2.7 mg/dm²
GC-MS screening result: No links could be found.

7.4 Eluate analysis

FUNDERMAX Compact panels have IIIa eluate classification as per ÖNORM S2072 and have waste code 57101 Phenol and melamine resin acc. to ÖN S2100. They are classified as being “similar to household waste”.

7.5 Phenol

Measuring agency: ISEGA- Forschungs- und Untersuchungs-Gesellschaft mbH, 63704 Aschaffenburg; Postfach 100565 63741 Aschaffenburg, Zeppelinstr. 3-5, Germany
Test reports, date: 29.08.2011
Overall migration result:
Sample 1: 3.8 mg/dm²
Sample 2: 2.7 mg/dm²
GC-MS screening result: No links could be found.

7.6 Formaldehyde

Measuring agency: Entwicklungs- und Prüflabor Holztechnologie GmbH, Zellescher Weg 24, 01217 Dresden, Germany
Test reports, date: 25.07.2011
Result: The test for formaldehyde content was carried out in accordance with the AgBB scheme for individual verification of formaldehyde.
Measurement 0.01 ppm after 3 days
Measurement 0.01 ppm after 7 days
The “Compact panel” product tested complies with the requirements of the AgBB scheme.

8. References

/IBU 2016/

IBU (2016): General Programme Instructions for the Preparation of EPDs at the Institut Bauen und Umwelt e.V., Version 1.1 Institut Bauen und Umwelt e.V., Berlin.
www.ibu-epd.de

/ISO 14025/

DIN EN /ISO 14025:2011-10/, Environmental labels and declarations — Type III environmental declarations — Principles and procedures

/EN 15804/

/EN 15804:2012-04+A1 2013/, Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

/IBU, Part A/

PCR, Product Category Rules for building-related products and services – Part A: Calculation rules for the LCA and requirements on the Project Report, version 1.7, Institut Bauen und Umwelt e.V., www.ibu-epd.com, 2018

/IBU, Part B/

PCR, Product Category Rules for building-related products and services – Part B: Requirements on the EPD for laminates, version 1.1, Institut Bauen und Umwelt e.V., www.ibu-epd.com, 2018

/DIN EN 438-7:2005-04/

High-pressure decorative laminates (HPL) – Sheets based on thermosetting resins (laminates) – Part 7: Compact panels and HPL composite panels for internal and external wall and ceiling finishes; German version EN 438-7:2005

/DIN EN 438-2:2016-06/

High-pressure decorative laminates (HPL) – Sheets based on thermosetting resins (laminates) – Part 2: Determination of properties; German version EN 438-2:2016

/DIN EN 438-4:2016-06/

High-pressure decorative laminates (HPL) – Sheets based on thermosetting resins (laminates) – Part 4: Classification and specifications for compact laminates of thickness 2 mm and greater; German version EN 438-2:2016

/DIN EN 438-6:2016-06/

High-pressure decorative laminates (HPL) – Sheets based on thermosetting resins (laminates) – Part 4: Classification and specifications for exterior-grade compact laminates of thickness 2 mm and greater; German version EN 438-2:2016

/DIN EN 12721:2009-07/

Furniture – Assessment of surface resistance to wet heat; German version EN 12721:2009

/DIN EN 13823:2015-02/

Reaction to fire tests for building products – Building products excluding floorings exposed to the thermal attack by a single burning item; German version EN 13823:2010+A1:2014

/DIN EN 717-1:2005-01/

Wood-based panels – Determination of formaldehyde release – Part 1: Formaldehyde emissions in accordance with the test chamber method; German version EN 717-1:2004

/EN 13501-1:2017-09/

Classification of building products and types by fire performance – Part 1: Classification with the results of tests on fire performance by building products; German version EN 13501-1:2017

/FunderMax Formaldehyde Test Report, 2011/

Entwicklungs- und Prüflabor Holztechnologie GmbH, Zellescher Weg 24, 01217 Dresden, Germany

/FunderMax Overall Migration Test Report, 2011/

Entwicklungs- und Prüflabor Holztechnologie GmbH, Zellescher Weg 24, 01217 Dresden, Germany

/FunderMax VOC Test Report, 2011/

Entwicklungs- und Prüflabor Holztechnologie GmbH, Zellescher Weg 24, 01217 Dresden, Germany

/GaBi 8.0:2018a/

Software system and data base for life cycle engineering; copyright, TM; Stuttgart, thinkstep AG, Echterdingen, 1992-2018

/GaBi 8.0:2018b/

Documentation of GaBi 6: software system and data base for life cycle engineering; copyright, TM;

Stuttgart, thinkstep AG, Echterdingen, 1992-2018.
<http://documentation.gabi-software.com/>

/ISO 1183-1:2013-04/

Plastics – Methods for determining the density of non-cellular plastics – Part 1: Immersion method, liquid pycnometer and titration method (ISO 1183-1:2012); German version EN ISO 1183-1:2012

/ISO 178:2013-09/

Plastics – Determination of flexural properties (ISO 178:2010 + Amd.1:2013); German version EN ISO 178:2010 + A1:2013

/Life cycle costs of facades/

Life cycle costs of facades; Life cycle costs analysis of selected facade systems using a multi-storey model residential building and various maintenance and cleaning scenarios; Danube University in Krems, Department of Building and Environment, 19.08.2015

/Reach Directive No. 1907/2006/

Directive (EU) No. 1907/2006 of the European Parliament and Council, 18 December 2006

/ISO 11925-2:2011-02/

Reaction to fire tests – Ignitability of products subjected to direct impingement of flame – Part 2: Single-flame source test (ISO 11925-2:2010); German version EN ISO 11925-2:2010

/ÖNORM S 2100: 2005 10 01/

European Waste Catalogue; Austrian version ÖNORM S 2100: 2005 10 01

**Publisher**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 3087748- 0
Fax +49 (0)30 3087748- 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Panoramastr 1
10178 Berlin
Germany

Tel +49 (0)30 - 3087748- 0
Fax +49 (0)30 - 3087748 - 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Author of the Life Cycle
Assessment**

thinkstep AG
Hauptstraße 111- 113
70771 Leinfelden-Echterdingen
Germany

Tel +49 711 341817-0
Fax +49 711 341817-25
Mail info@thinkstep.com
Web <http://www.thinkstep.com>

**Owner of the Declaration**

FunderMax GmbH
Klagenfurter Straße 87-89
9300 St. Veit/Glan
Austria

Tel +43 (0)5/9494-0
Fax +43 (0)5/9494-4200
Mail office@fundermax.at
Web www.fundermax.at

CERTIFICATE OF COMPLIANCE



FunderMax GmbH

Max Compact Interior

102040-410

Certificate Number

03 Nov 2017 - 03 Nov 2024

Certificate Period

Certified

Status

UL 2818 - 2022 Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Wall finishes are determined compliant using an Office Environment with an air change of 0.68 hr^{-1} and a loading of 33.40 m^2 .

Products tested in accordance with UL 2821 test method to show compliance to emission limits in UL 2818, Section 7.1.



UL investigated representative samples of the identified Product(s) to the identified Standard(s) or other requirements in accordance with the agreements and any applicable program service terms in place between UL and the Certificate Holder (collectively "Agreement"). The Certificate Holder is authorized to use the UL Mark for the identified Product(s) manufactured at the production site(s) covered by the UL Test Report, in accordance with the terms of the Agreement. This Certificate is valid for the identified dates unless there is non-compliance with the Agreement.

GREENGUARD Certification Criteria for Building Products and Interior Finishes

Criteria	CAS Number	Maximum Allowable Predicted Concentration	Units
TVOC ^(A)	-	0.50	mg/m ³
Formaldehyde	50-00-0	61.3 (50 ppb)	µg/m ³
Total Aldehydes ^(B)	-	0.10	ppm
Particle Matter less than 10 µm ^(C)	-	50	µg/m ³
4-Phenylcyclohexene	4994-16-5	6.5	µg/m ³
Individual VOCs ^(D)	-	1/10th TLV	-

- (A) Defined to be the total response of measured VOCs falling within the C₆ – C₁₆ range, with responses calibrated to a toluene surrogate. Maximum allowable predicted TVOC concentrations for GREENGUARD (0.50 mg/m³) fall in the range of 0.5 mg/m³ or less, as specified in CDPH Standard Method v1.2.
- (B) The sum of all measured normal aldehydes from formaldehyde through nonanal, plus benzaldehyde, individually calibrated to a compound specific standard. Heptanal through nonanal are measured via TD/GC/MS analysis and the remaining aldehydes are measured using HPLC/UV analysis.
- (C) Particle emission requirement only applicable to HVAC Duct Products with exposed surface area in air streams (a forced air test with specific test method) and for wood finishing (sanding) systems.
- (D) Allowable levels for chemicals not listed are derived from 1/10th of the Threshold Limit Value (TLV) industrial work place standard (Reference: American Conference of Government Industrial Hygienists, 6500 Glenway, Building D-7, and Cincinnati, OH 45211-4438).



Certificate SGSCH-PEFC-COC-110073

The Organization

FunderMax GmbH

Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria

has been assessed and certified as meeting the requirements of

PEFC - Chain of Custody

PEFC ST 2002:2020 – “Chain of Custody of Forest and Tree Based Products – Requirements” - dated 14/02/2020

PEFC ST 2001:2020 - PEFC Trademarks Rules – Requirement – dated 14/02/2020.

as amended and published on www.pefc.org

For the products detailed in the scope below:

Einkauf von Industrierundholz, Sägereiestholz Recyclingholz und Papier x% PEFC, PEFC Controlled Sources und Controlled Sources.

Herstellung, Vertrieb, und Verkauf von Holzplatten und Compact Laminaten x% PEFC nach der Kreditmethode mehrere Standorte. Ein- und Verkauf von Papier mit der Methode der physischen Trennung.

Purchase of industrial roundwood, sawmill by-products, recycled wood and paper x% PEFC, PEFC Controlled Sources and Controlled Sources.

Production, distribution and sale of wooden panels and compact laminates x% PEFC using the credit method at several locations.

Buying and selling paper using the physical separation method.

This certificate is valid from 11 July 2023 until 02 August 2026 and remains valid subject to satisfactory surveillance audits.

Issue 7 Certified since 03 August 2016

This is a multi-site certification.

Additional member details are listed on the subsequent page.



Authorised by
Sylvie Seisun

Authorised by
Christian Kobel

SGS Société Générale de Surveillance SA
1, Place des Alpes, 1201 Geneva, Switzerland
t +41 (0)22 739 91 11 - www.sgs.com

More detailed product specifications covered by the scope of this certificate are provided on the PEFC Certificate Database <https://www.pefc.org/find-certified>. Organisations with a valid PEFC chain of custody certificate can only use the PEFC Logo with unique PEFC license logo number based on PEFC Logo usage license contract issued by the PEFC Council or another entity authorised by the PEFC Council and in accordance with the PEFC logo usage rules.



This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FunderMax GmbH



PEFC - Chain of Custody

Additional facilities

Issue 7
Sites
FunderMax GmbH Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria
FunderMax GmbH Bickfordstraße 6, 7201 Neudörf, Austria
FunderMax GmbH Industriezentrum NÖ-Süd, 2355 Wiener Neudorf, Austria
Fundermax Swiss AG Industriestraße 38, 5314 Kleindöttingen, Switzerland
Baufeld Austria GmbH Viktringer Ring 28, 9020 Klagenfurt, Austria



This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.





SENTINEL HAUS
INSTITUT

ZERTIFIKAT

QNG Ready

MAX Compact

Fundermax
For you to create

FunderMax GmbH
Klagenfurter Straße 87-89
9300 St. Veit/Glan

Dieses Produkt wurde durch das Sentinel Haus Institut geprüft, bewertet und freigegeben. Es erfüllt die Kriterien für Schadstoffvermeidung in Baumaterialien (Anhangsdokument 3.1.3) vorgegeben durch das Qualitätssiegel Nachhaltiges Gebäude (QNG).

Position laut Anhangsdokument 3.1.3

9.1 Holzwerkstoffe (FPY, OSB und HPL) für den Holzbau und Innenausbau

Das QNG ready Siegel des Sentinel Haus Instituts kennzeichnet Produkte, welche für die KfW-Förderung „Klimafreundliches Wohngebäude/ Nichtwohngebäude“ qualifiziert sind.

Dieses Produkt ist im Portal für das gesunde und nachhaltige Betreiben, Bauen, Sanieren und Renovieren von Gebäuden gelistet.

Peter Bachmann
Geschäftsführer und Gründer
Freiburg, den 02.11.2023





Anlage zum Zertifikat

Betrachtung nach QNG Anhangsdokument 3.1.3
Schadstoffvermeidung in Baumaterialien (Version 1.3)

Produktname:	MAX Compact
Hersteller:	FunderMax GmbH
Position & Bauproduktgruppe:	9.1 Holzwerkstoffe (FPY, OSB und HPL) für den Holzbau und Innenausbau
Betrachtete Stoffe:	Formaldehyd / VOC / Emissionen / gefährliche Stoffe / SVHC: Borverbindungen
Regelwerk/Bezugsnorm:	MVV TB / ChemVerbotsV / DE-UZ 76 / 1907/2006/EG
QNG-Anforderungen Schadstoffvermeidung:	Einhaltung AgBB-Schema; Formaldehyd $\leq 0,08$ ppm ($0,096 \text{ mg/m}^3$) in Prüfkammer; Reproduktionstoxische Borverbindungen $\leq 0,10 \%$
Nachweis:	Herstellereklärung vom 04.07.2023. Prüfbericht des Instituts EPH Entwicklungs- und Prüflabor Holztechnologie GmbH (Prüfbericht Nr. 2517203) vom 09.01.2018. Konformitätserklärung vom 11.09.2023 bestätigt die weitere materielle Übereinstimmung mit dem geprüften Produkt.

Ausgestellt am 02.11.2023

Vollständige Kriterien abrufbar unter www.sentinel-haus.de/de/Sentinel-Haus/Qualitäten/Qualitätskriterien





Certificate

SURE-EU/DE-011/Z01400106

By means of an audit on 09.11.2023 & 20.11.2023, documented in a report

GFA Certification GmbH

SURE-EU-Cert-DE-011

Alter Teichweg 15, 22081 Hamburg, Germany

confirms to

Fundermax GmbH Neudörfel

Bickfordstraße 6, 7201 Neudörfel, Austria

13.02.2002 date of installation

the compliance with the requirements of the certification system



SURE-EU Certification Scheme

for demonstrating compliance with the sustainability criteria under Directive (EU) 2018/2001 of the European Parliament and the Council based on SURE Scheme documentation valid at time of the audit.

This certificate serves as proof of compliance with the requirements of Directive (EU) 2018/2001 for the following scopes:

(1302) - Producer of waste and residues

(5102) - Heat from biomass (solid biomass)

Date of certification decision: 15.12.2023.

This certificate is valid* from 15.12.2023 to 14.12.2024.

Hamburg, 15.12.2023

Place and Date

Signature of certification body

The Certification Body is responsible for the accuracy of the certificate.

*Decisive for the validity of the certificate is exclusively the information given on the website of SUSTAINABLE RESOURCES Verification Scheme GmbH. The holder of this certificate is obliged to immediately implement any amendments of corresponding scheme principles.

Deviations can result for example from the withdrawal or suspension of an issued certificate. Since this certificate is property of the certification body, in eligible cases it must be returned on request